




M65

PowerMulcher Series Straw Blower

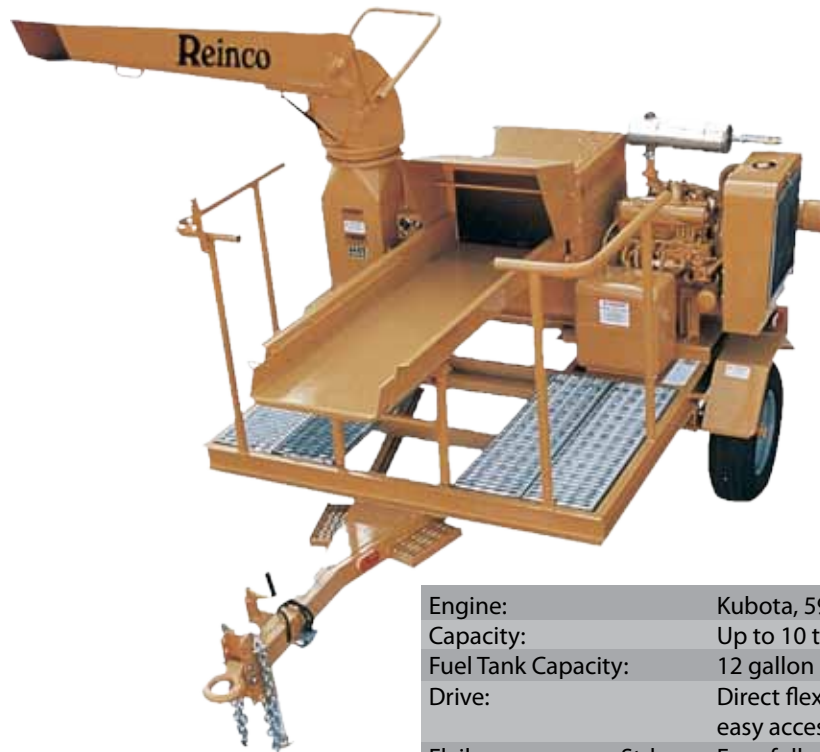

The Epic M65 PowerMulcher is ideal for medium to large production sites with bale capacity for up to ten tons of hay or straw per hour, and placement of up to 85 feet. This rugged, high performance machine features improved mulch separation offering high production rates even with poor quality mulches. The sturdy, two-piece fully adjustable feed tray extends to speed mulch delivery to the placement operator. Five acres or more can be mulched in an hour or less. Combining over forty years of experience in this specialized field, Epic's commitment to customer service, and with an industry leading two-year PowerMulcher warranty, your satisfaction can be assured.

- 59 hp Kubota Diesel Engine
- 10 Ton Per Hour Mulch Output
- Discharge Distance 85 Feet in Still Air
- Discharge Placement Hose Option
- Standard Heavy Duty Trailer
- Skid Mount Version Available
- Exclusive Two Year Warranty

Engine:		Kubota, 59 hp (44 kW), water cooled diesel
Capacity:		Up to 10 tons per hour
Fuel Tank Capacity:		12 gallon (45.4 liter)
Drive:		Direct flexible insert drive coupling features easy access replacement bushings
Flail:	Std.	Four fully adjustable full hardened chan flail stations
	Opt.	Flail knives make easy work of tough materials
Blower:		26 1/8" OD, six blade reinforced material handling type wheel, dynamically and statically balanced
Discharge Head:		Heavy duty slew bearing mounted, gas charged spring counter balanced with center mount bearings, 360 degree horizontal rotation, 60 degree vertical articulation, urethane abrasion resistant rolling boom seals and stainless steel side wipers
Range:		Up to 85 ft (25.9 m)
Brakes:	Trailer	Electric brakes with brake away switch
Lights:	Trailer	DOT compliant LED lighting including marker, identification lights, and license plate bracket
Axle:	Trailer	5200 lb precambered with steel shackle type spring assembly
Tires:	Trailer	ST225/75R15 8 ply
Hitch:	Trailer	2 5/16" ball hitch - lunette eye optional
Weight:	Skid	2200 lbs. (998 kg)
	Trailer	2400 lbs (1220 kg)
Length:	Skid	8'9" (3 m)
	Trailer	11' 10" (3.6 m)
Width:	Skid	8' 0" (2.4 m)
	Trailer	7' 11 1/2" (2.4 m)
Height:	Skid	6' 0" (1.8 m)
	Trailer	7' 2 1/2" (2.2 m)